


1

In the box there are the following items:

- Sas/Sata to miniSAS cable
- FAN
- Plastic taps


2

Take the FAN and the four plastic taps. Plug them into the holes around the FAN like it is shown in pictures:




3

Position the fan on the cage and connect the cable to the motherboard, on the system fan connector.

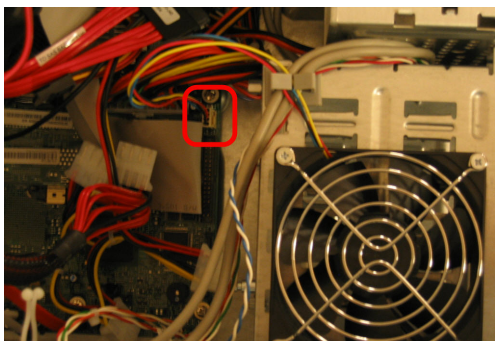


4

Push each plastic tap from the internal part of the cage to fix the FAN to the metal cage

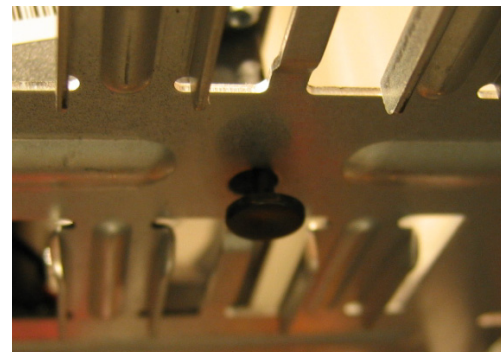


5

If you are going to use only 2 HDDs, please place the hard disk drives in the order showed in the picture to keep the temperature low inside the cage.

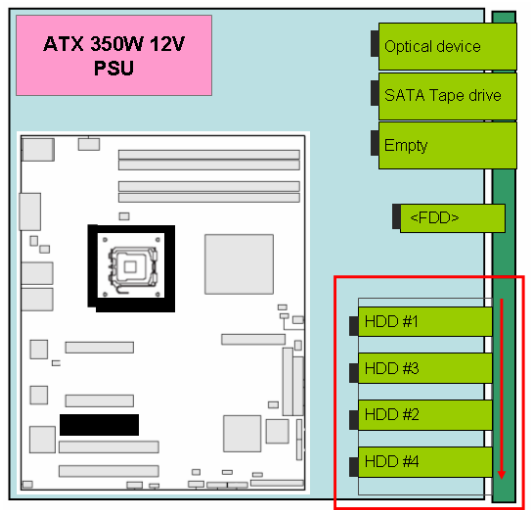


6

SO.SA256.A01 and SO.SA000.A02 are not included in the package, they must be bought separately.

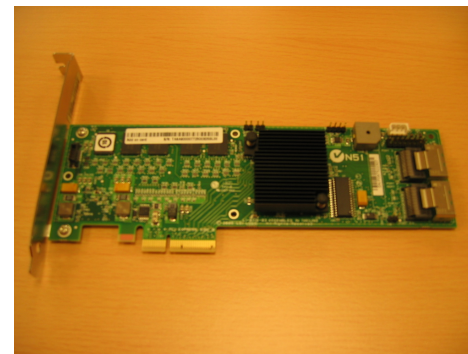


7

Use this cable to connect the controller to each HDDs.

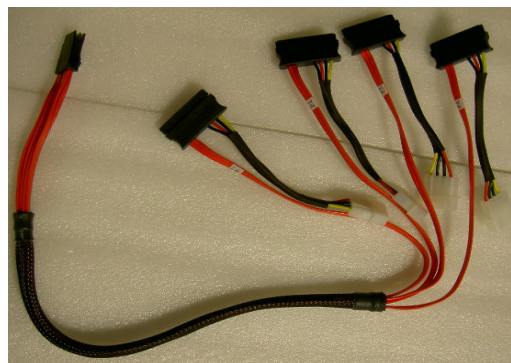

8

Only one power connector must be used. Please use the full SATA connector for data and power.

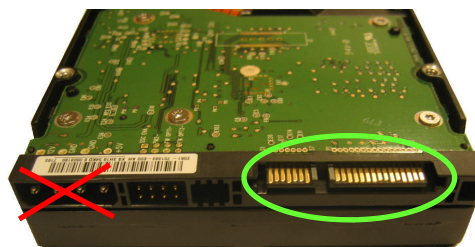

9

Please always check the latest available firmware on the Acer Support Website (<http://support.acer-euro.com>) and update the SAS Controller